



LED MARKET

MIRACLE<sup>®</sup>



## INDOOR LED PANEL


# P 1.99mm

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3-year warranty for all parts.
- USA based.
- In stock. Ships immediately.


FRONT



BACK

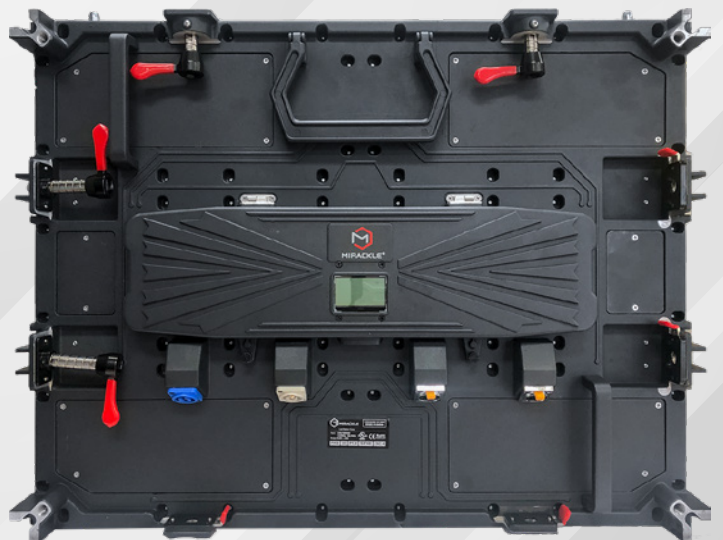

FRONT SERVICEABLE



HIGH REFRESH RATE



HIGHER RESOLUTION



FIXED & RENTAL CABINETS



INDOOR PANEL



WALL MOUNTABLE



LED MARKET

MIRACKLE<sup>®</sup>

FRONT & BACK SERVICEABLE



WALL MOUNTABLE



HANGING BAR: FRONT



HANGING BAR: BACK



P 1.99mm

INDOOR LED PANEL




# DIMENSIONS

## FRONT SIZE

25,2 inches  
64 cm


6,3 inches  
16 cm

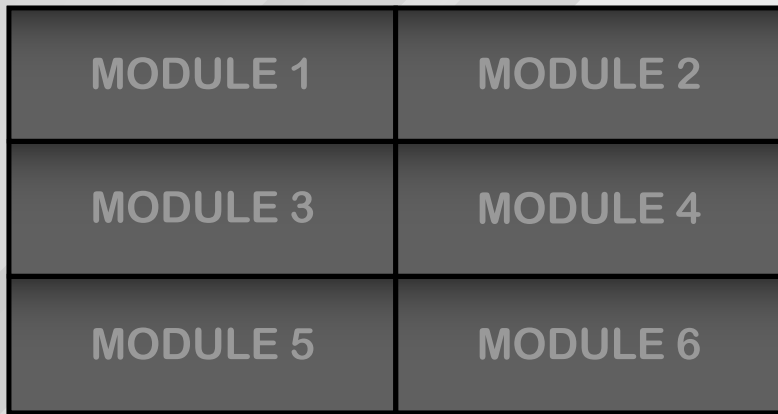

12,6 inches  
32 cm


## SIDE SIZE

3 inches  
7,5 cm

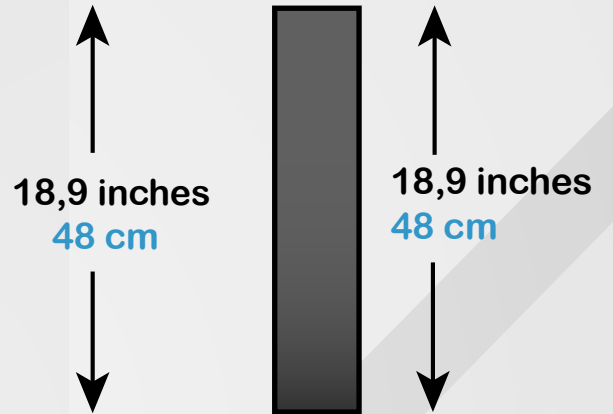

# VIEWING DISTANCE

<b>Pixel Pitch (mm)</b>	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.5
<b>Min. View Distance</b>	25 ft.	20 ft.	15 ft.	10 ft.	6 ft.	5 ft.	4 ft.	3 ft.

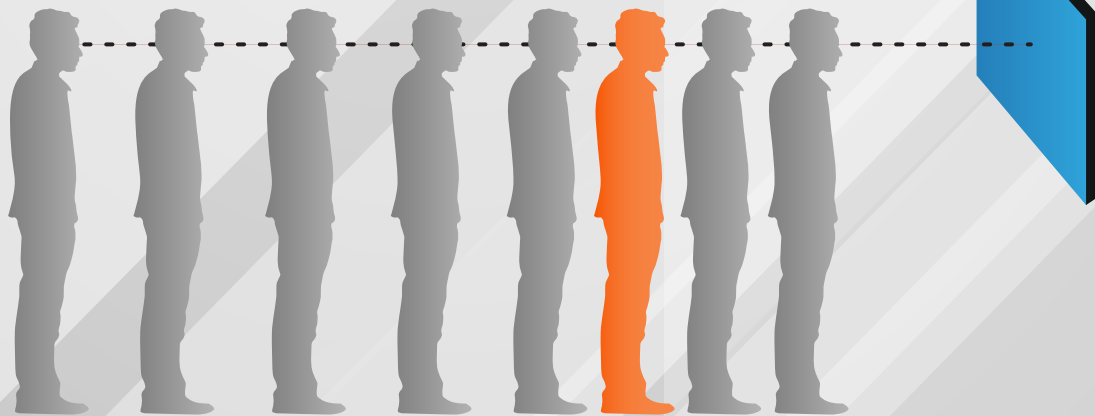

P 1.99mm

INDOOR LED PANEL



## TECHNICAL SPECIFICATIONS

PIXEL PITCH	P1.99mm
LED ENCAPSULATION	King-Light SMD 1515
PIXEL DENSITY	320 x 240
SIZE	25.2" x 18.9" x 3" / 640 x 480 x 75mm
CHIP	ICN2065
HIGH REFRESH RATE	3840hz
WEIGHT	21 lbs / 9,6 kg
RECEIVING CARD	NovaStar MRV412

## POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	200W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS

BRIGHTNESS	700 NITS
PROTECTION RATE	IP45
SCAN	1/40 s
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 160°/Vertical 160°
MINIMUM VIEWING DISTANCE	5 ft (1,5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 1.99mm

INDOOR LED PANEL