




## INDOOR LED PANEL

# P 5mm

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3-year warranty for all parts.
- USA based.
- In stock. Ships immediately.


FRONT

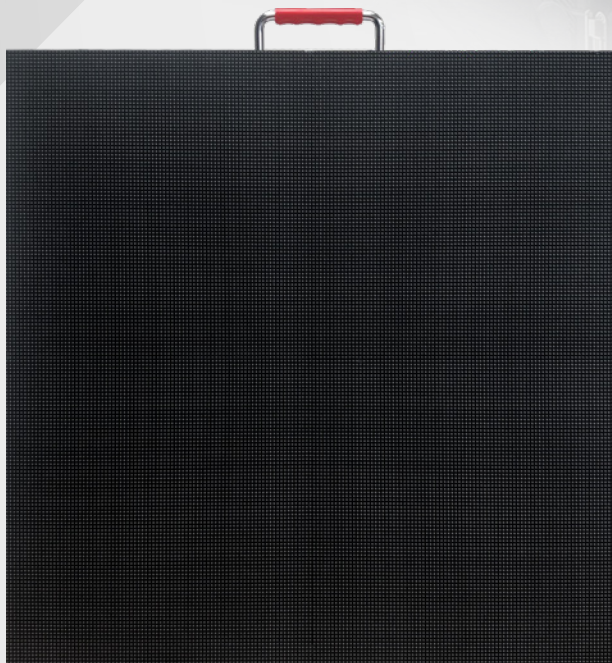

BACK



BACK  
SERVICEABLE



HIGH REFRESH  
RATE



HIGHER  
RESOLUTION



FIXED & RENTAL  
CABINETS




INDOOR  
PANEL




LED MARKET

MIRACKLE

BACK SERVICEABLE

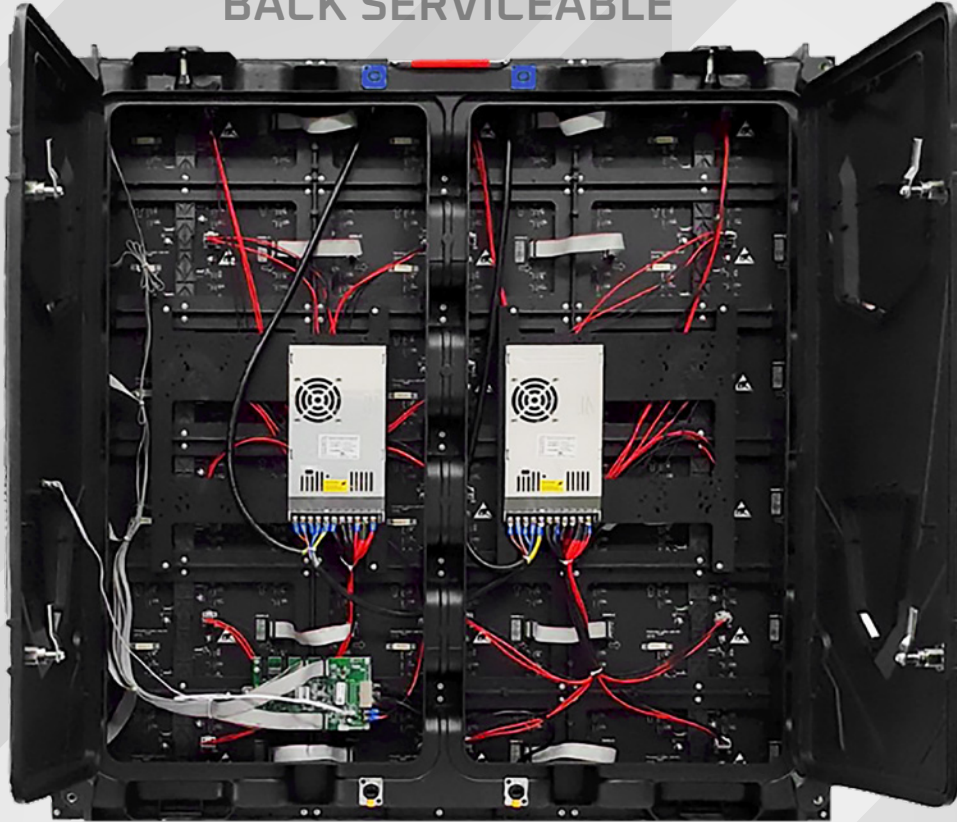

HANGING BAR: FRONT

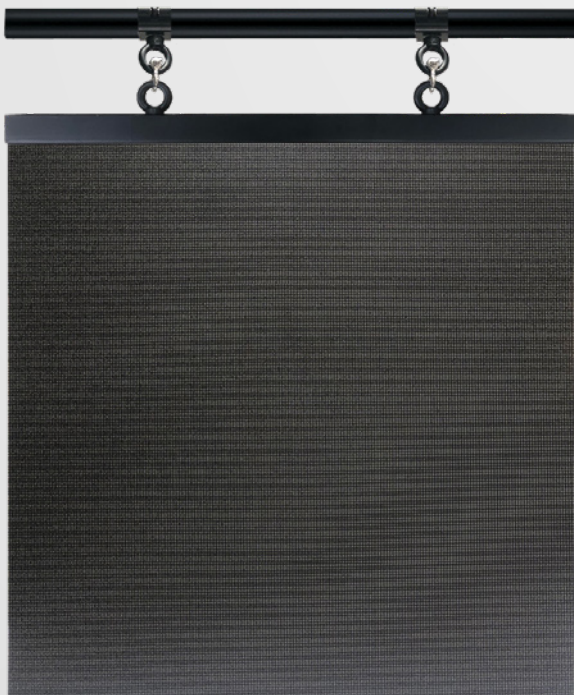

HANGING BAR: BACK




P 5mm

INDOOR LED PANEL




# DIMENSIONS

## FRONT SIZE

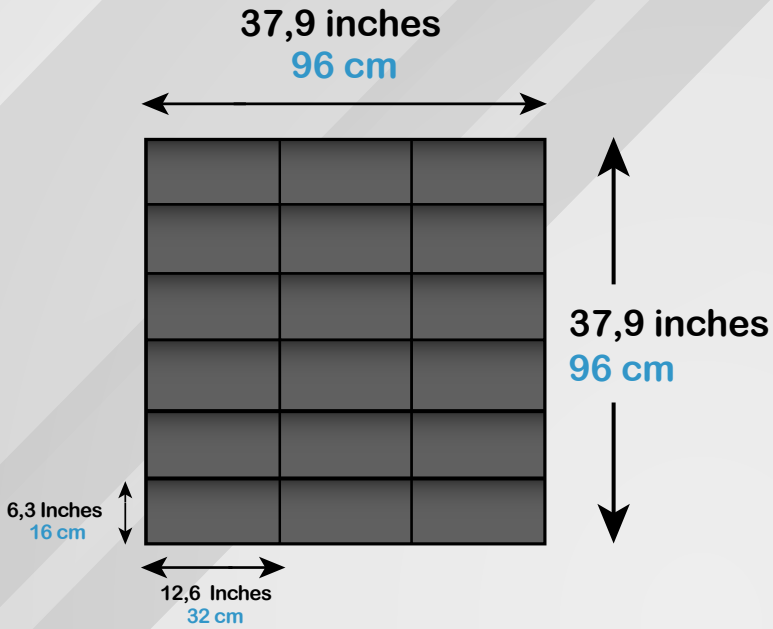


## SIDE SIZE

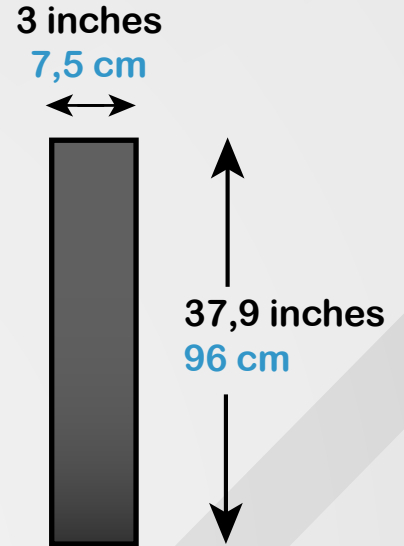

# VIEWING DISTANCE

<b>Pixel Pitch (mm)</b>	<b>5.0</b>	<b>4.8</b>	<b>3.9</b>	<b>2.9</b>	<b>2.5</b>	<b>1.9</b>	<b>1.8</b>	<b>1.5</b>
<b>Min. View Distance</b>	<b>25 ft.</b>	<b>20 ft.</b>	<b>15 ft.</b>	<b>10 ft.</b>	<b>6 ft.</b>	<b>5 ft.</b>	<b>4 ft.</b>	<b>3 ft.</b>

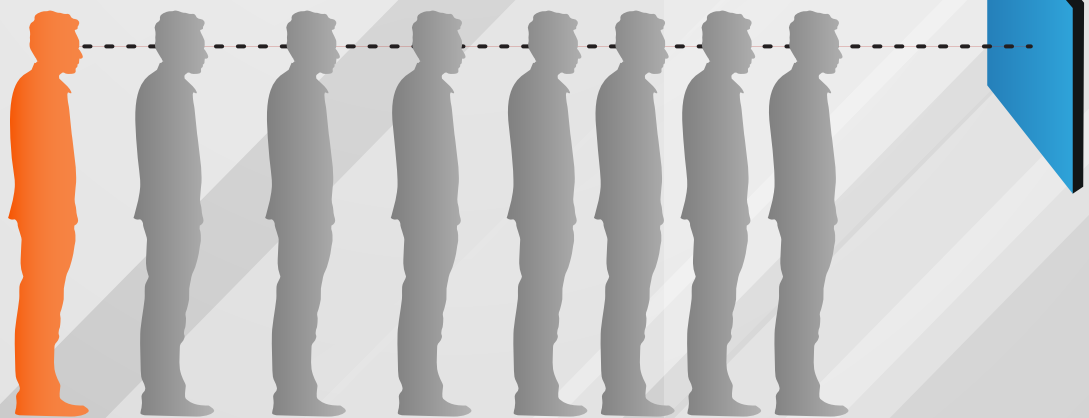



## TECHNICAL SPECIFICATIONS

PIXEL PITCH	P5mm
LED ENCAPSULATION	King-Light SMD2020
PIXEL DENSITY	192 x 192
SIZE	37.9" x 37.9" x 3" / 960 x 960 x 80mm
CHIP	ICN1065
HIGH REFRESH RATE	3840hz
WEIGHT	55 lbs / 25 kg
RECEIVING CARD	NovaStar MRV208-1

## POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	600W/per panel
AVE. POWER CONSUMPTION	240W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS

BRIGHTNESS	700 NITS
PROTECTION RATE	IP45
SCAN	1/16 s
FRAME FREQUENCY	3840 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
MINIMUM VIEWING DISTANCE	25 ft (7.6m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 5mm

INDOOR LED PANEL