




FRONT

# INDOOR LED PANEL P 2.6mm

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 24 months warranty for all parts.
- USA based.
- In stock. Ships immediately.

BACK

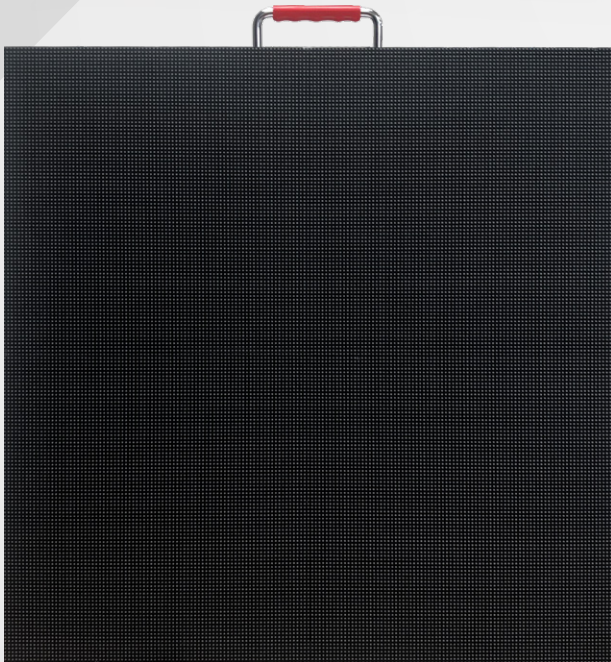

FRONT SERVICEABLE



HIGH REFRESH RATE



HIGHER RESOLUTION



FIXED & RENTAL CABINETS



INDOOR PANEL



WALL MOUNTABLE



LED MARKET

MIRACKLE<sup>®</sup>

FRONT & BACK SERVICEABLE



WALL MOUNTABLE



HANGING BAR: FRONT



HANGING BAR: BACK




P 2.6mm

INDOOR LED PANEL




# DIMENSIONS

## FRONT SIZE

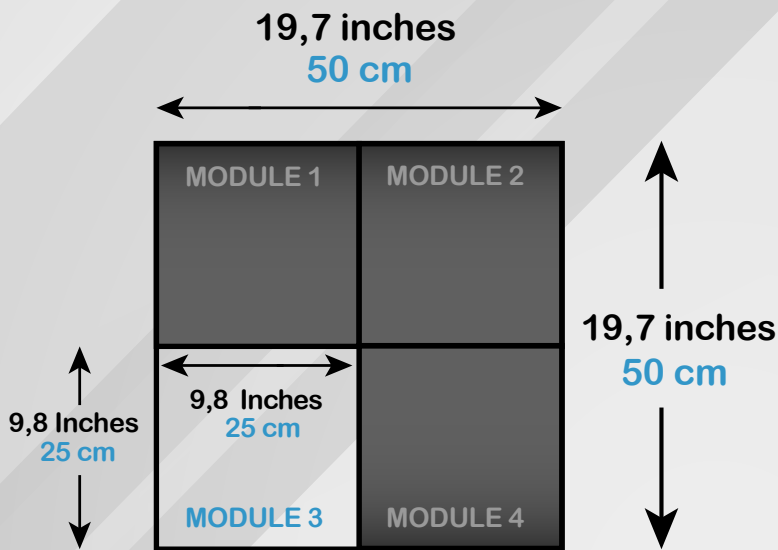


## SIDE SIZE

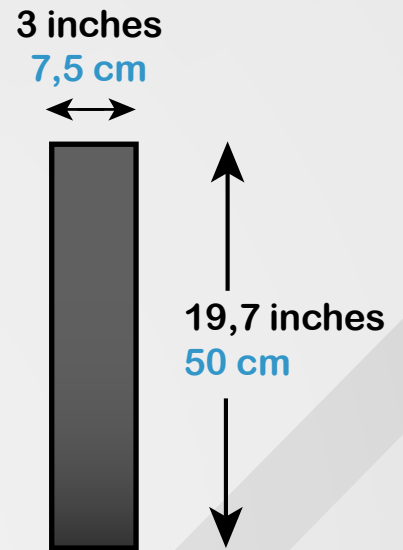

# VIEWING DISTANCE

4.9	<b>Pixel Pitch (mm)</b>	3.9	2.9	2.6	1.9	1.5	1.2	0.9
16 ft.	<b>Optimal Viewing Distance</b>	8 ft.	6 ft.	5.7 ft.	5 ft.	4 ft.	3 ft.	2 ft.

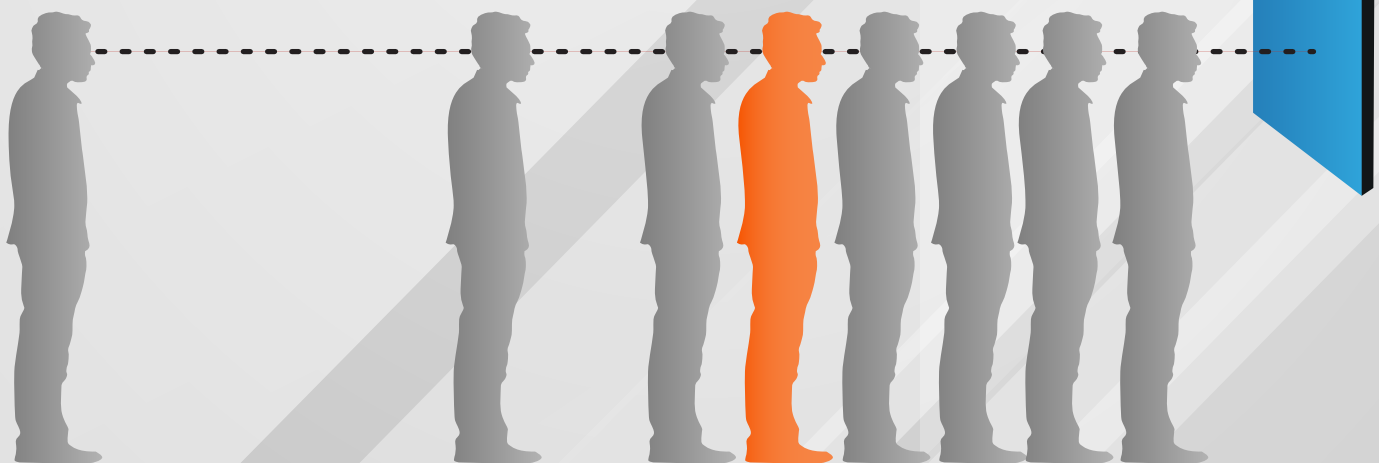

P 2.6mm

INDOOR LED PANEL



## TECHNICAL SPECIFICATIONS

PIXEL PITCH	P2.6mm
LED ENCAPSULATION	King-Light SMD1515
PIXEL DENSITY	192 x 192
SIZE	19.7" x 19.7" x 3" / 500 x 500 x 75mm
CHIP	IC2153
HIGH REFRESH RATE	3840hz
WEIGHT	16 lbs / 8 kg
RECEIVING CARD	NovaStar MRV-432

## POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	150W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS

BRIGHTNESS	1500 NITS
PROTECTION RATE	IP45
SCAN	1/16
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
OPTIMAL VIEW DISTANCE	5 ft (1.5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 2.6mm

INDOOR LED PANEL