




OUTDOOR LED PANEL

P 5mm

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3-year warranty for all parts.
- USA based.
- In stock. Ships immediately.

FRONT

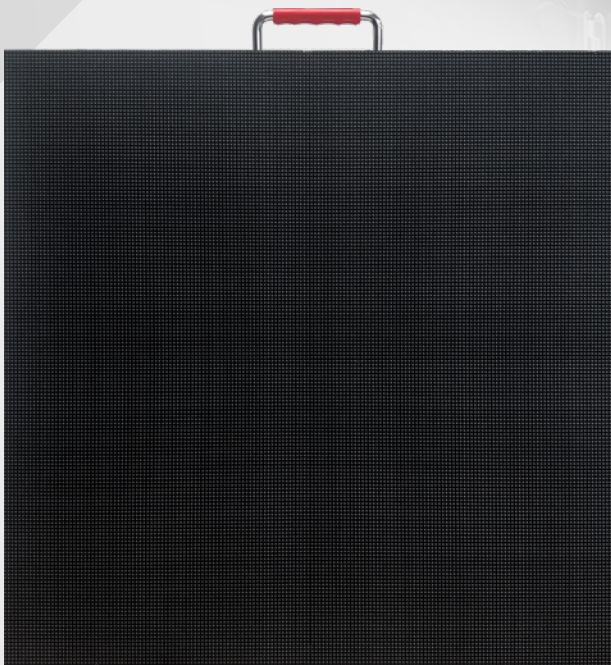

BACK



BACK SERVICEABLE



HIGH REFRESH RATE



HIGHER RESOLUTION



FIXED & RENTAL CABINETS




IP65 / RAIN RESISTANT



LED MARKET

MIRACKLE

BACK SERVICEABLE

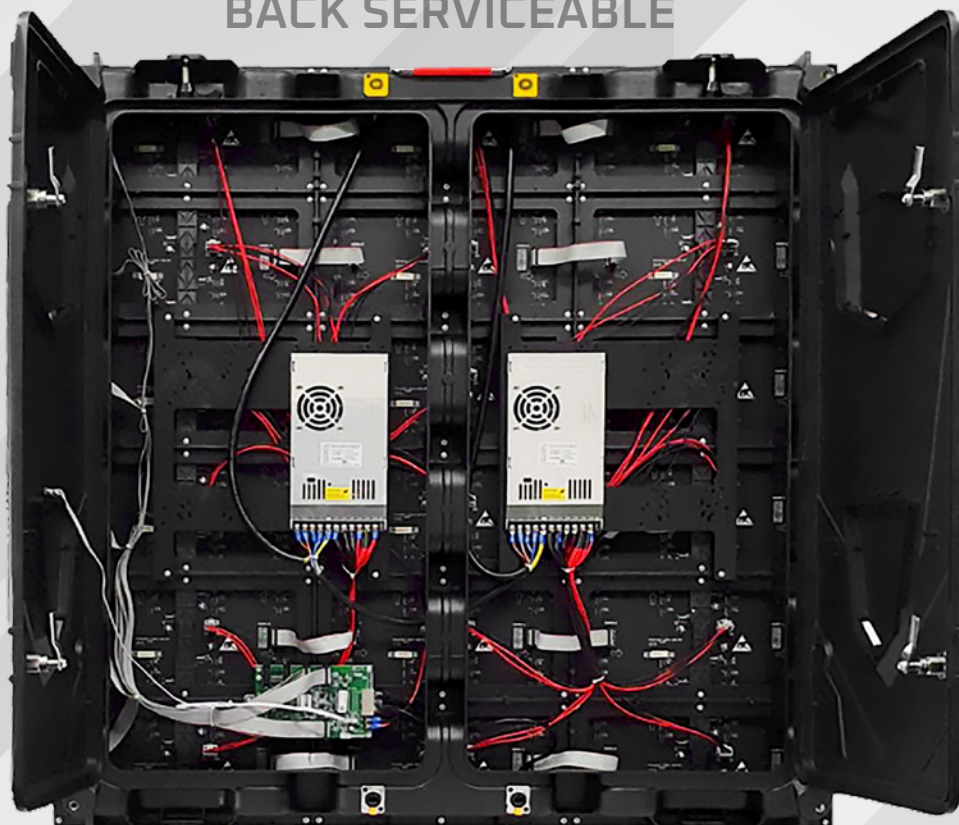

HANGING BAR: FRONT



HANGING BAR: BACK




P 5mm

OUTDOOR LED PANEL




DIMENSIONS

FRONT SIZE

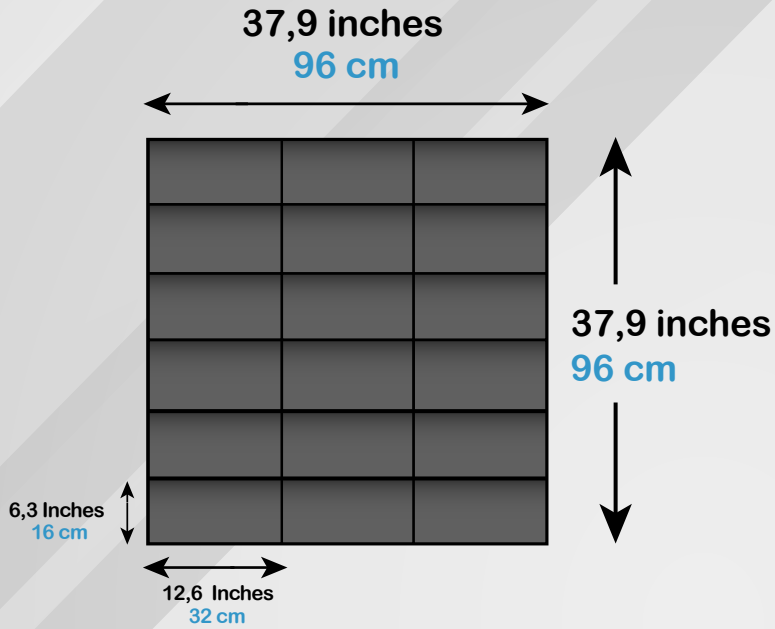


SIDE SIZE

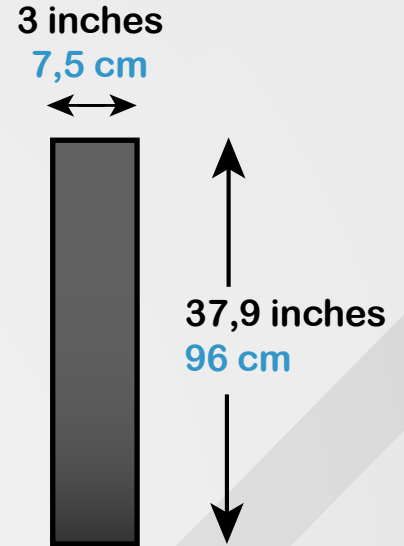

VIEWING DISTANCE

Pixel Pitch (mm)	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.5
Min. View Distance	25 ft.	20 ft.	15 ft.	10 ft.	6 ft.	5 ft.	4 ft.	3 ft.

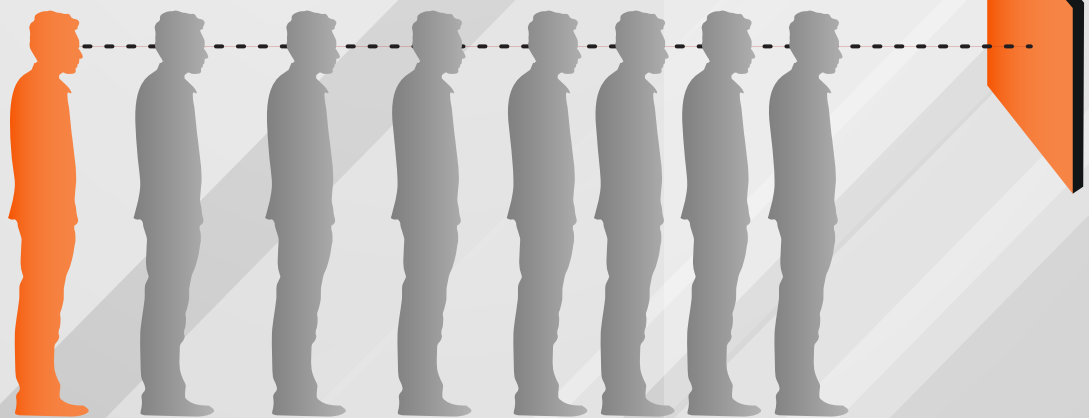

P 5mm

OUTDOOR LED PANEL



TECHNICAL SPECIFICATIONS

PIXEL PITCH	P5mm
LED ENCAPSULATION	SMD 1820 / 1921
PIXEL DENSITY	192 x 192
SIZE	37.9" x 37.9" x 3" / 960 x 960 x 80mm
CHIP	IC2153
HIGH REFRESH RATE	3840hz
WEIGHT	60 lbs / 27 kg
RECEIVING CARD	NovaStar MRV208-1

POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	900W/per panel
AVE. POWER CONSUMPTION	360W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS

BRIGHTNESS	5200 NITS
PROTECTION RATE	IP65
SCAN	1/8 s
FRAME FREQUENCY	3840 Hz
VIEW ANGLE	Horizontal 170°/Vertical 120°
MINIMUM VIEWING DISTANCE	25 ft (7.6m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 5mm

OUTDOOR LED PANEL