




LED MARKET

MIRACLE



FRONT

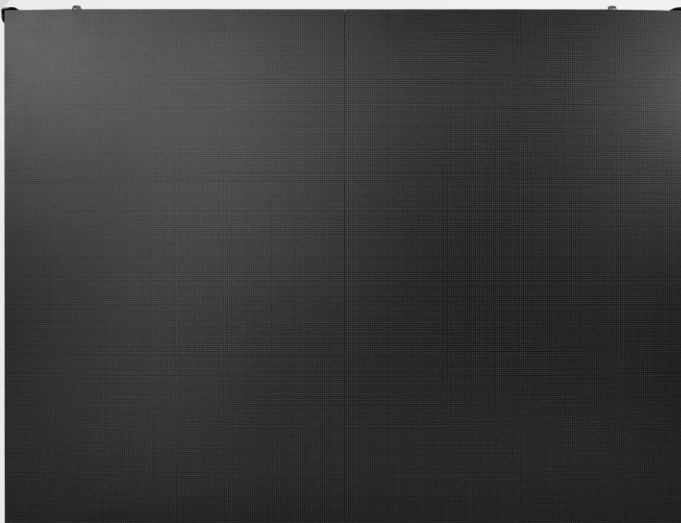

**INDOOR LED PANEL**

**P 1.53mm**


- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 24 months warranty for all parts.
- USA based.
- In stock. Ships immediately.



BACK



FRONT SERVICEABLE



HIGH REFRESH RATE



HIGHER RESOLUTION



FIXED & RENTAL CABINETS



INDOOR PANEL



WALL MOUNTABLE



LED MARKET

MIRACLE

FRONT & BACK SERVICEABLE



WALL MOUNTABLE



HANGING BAR: FRONT



HANGING BAR: BACK



P 1.53mm

INDOOR LED PANEL




# DIMENSIONS

## FRONT SIZE

25,2 inches  
64 cm


6,3 inches  
16 cm

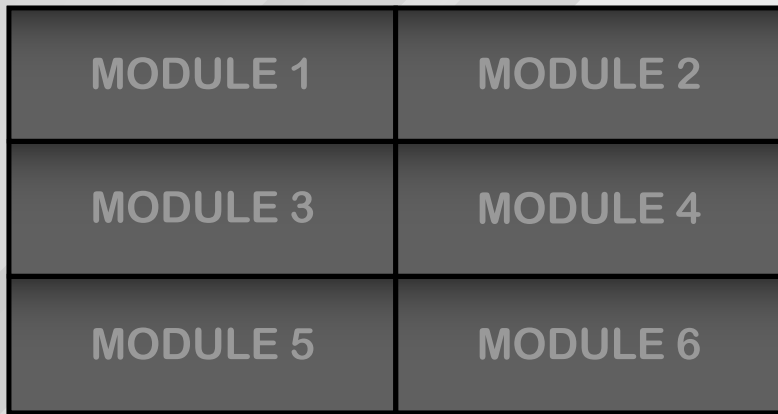

12,6 inches  
32 cm


## SIDE SIZE

3 inches  
7,5 cm

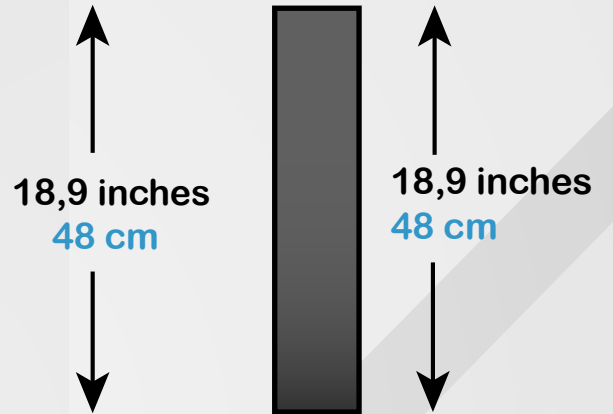

# VIEWING DISTANCE

4.9	<b>Pixel Pitch (mm)</b>	3.9	2.9	2.6	<b>1.53</b>	1.5	1.2	0.9
16 ft.	<b>Optimal Viewing Distance</b>	8 ft.	6 ft.	5.7 ft.	<b>5 ft.</b>	4 ft.	3 ft.	2 ft.

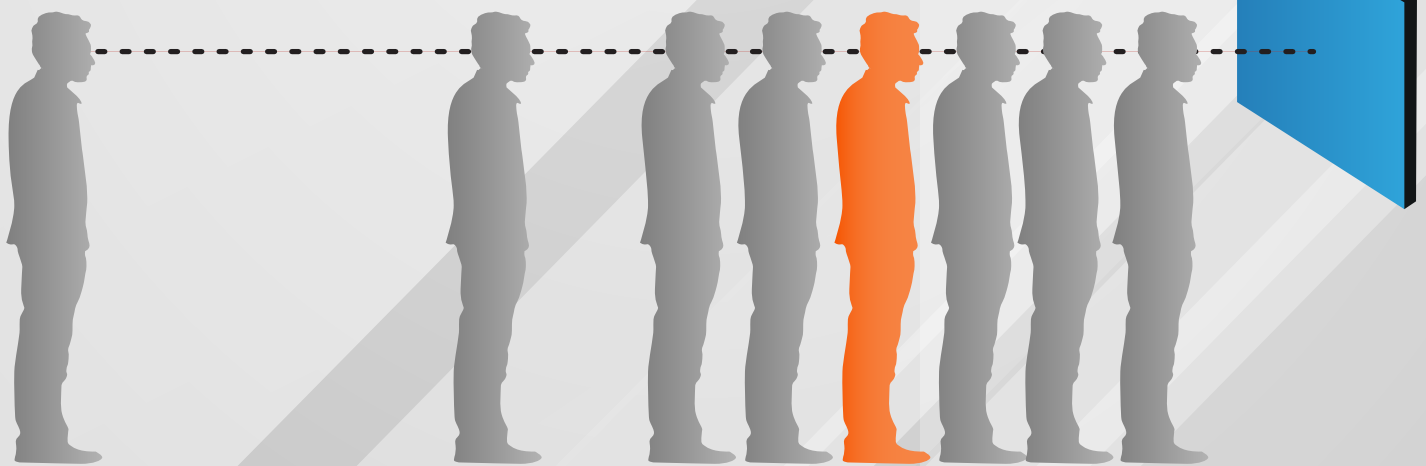

P 1.53mm

INDOOR LED PANEL



## TECHNICAL SPECIFICATIONS

PIXEL PITCH	P1.53mm
LED ENCAPSULATION	King-Light SMD 1212
PIXEL DENSITY	416 x 312
SIZE	25.2" x 18.9" x 3" / 640 x 480 x 75mm
CHIP	ICN1065
HIGH REFRESH RATE	3840hz
WEIGHT	9.6 kg/pc
RECEIVING CARD	NovaStar A85-N

## POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	200W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS

BRIGHTNESS	700 NITS
PROTECTION RATE	IP45
SCAN	1/52s
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 160°/Vertical 160°
OPTIMAL VIEW DISTANCE	5 ft (1.5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 1.53mm

INDOOR LED PANEL