




FRONT

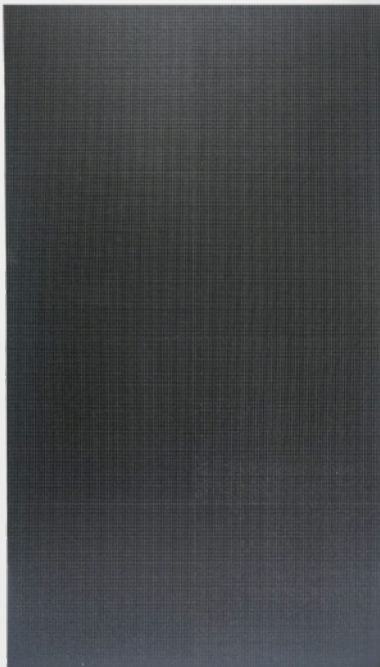

OUTDOOR LED PANEL

P 3.91mm


DOUBLE 500x1000

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3-year warranty for all parts.
- USA based.
- In stock. Ships immediately.

BACK



BACK SERVICEABLE



HIGH REFRESH RATE



HIGHER RESOLUTION



FIXED & RENTAL CABINETS



IP65 / RAIN RESISTANT




LED MARKET

MIRACKLE

HANGING BAR: BACK



HANGING BAR: FRONT

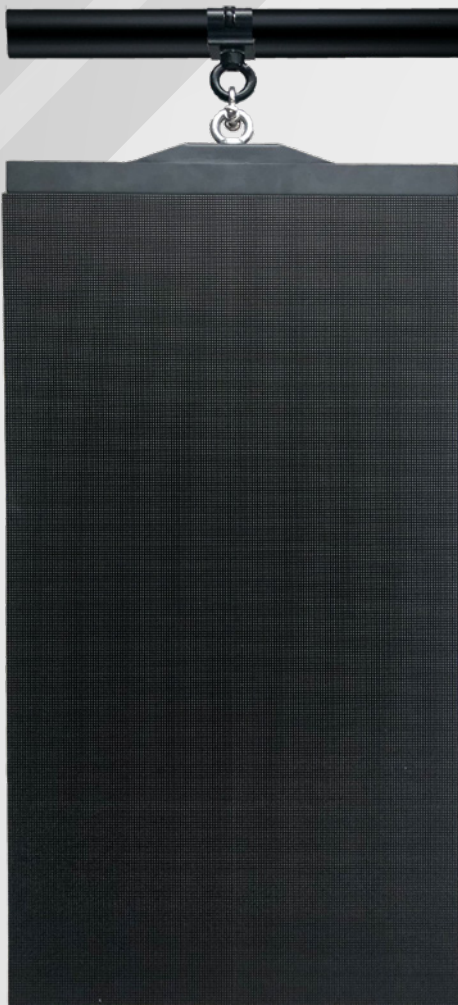

P 3.91mm


OUTDOOR LED PANEL

DOUBLE




# DIMENSIONS

## FRONT SIZE

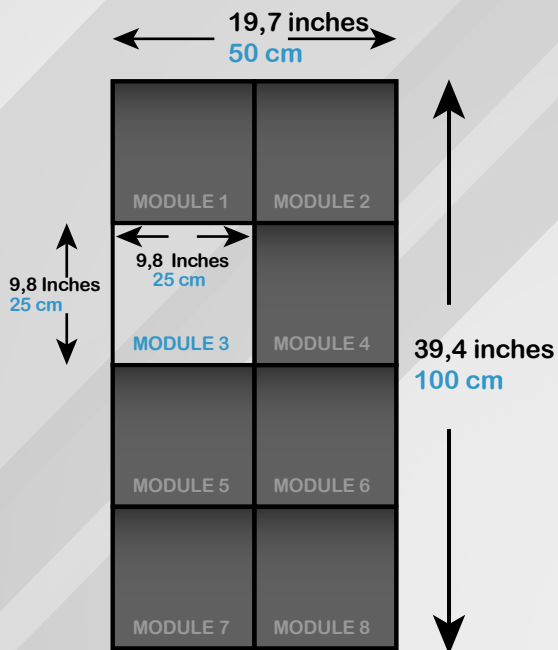


## SIDE SIZE

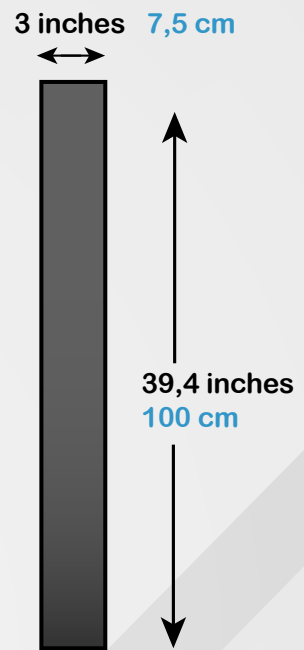

# VIEWING DISTANCE

Pixel Pitch (mm)	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.5
Min. View Distance	25 ft.	20 ft.	15 ft.	10 ft.	6 ft.	5 ft.	4 ft.	3 ft.

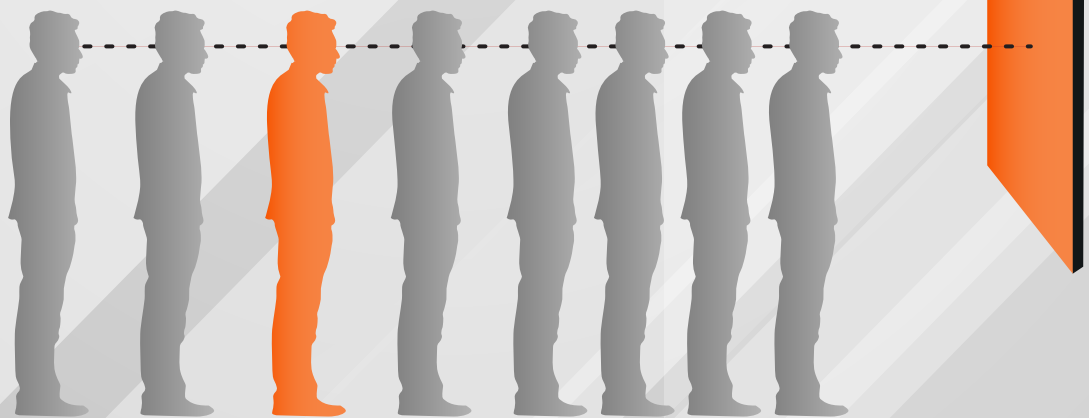

P 3.91mm

OUTDOOR LED PANEL

DOUBLE



## TECHNICAL SPECIFICATIONS

PIXEL PITCH	P3.91mm
LED ENCAPSULATION	King-Light SMD1820 / 1921
PIXEL DENSITY	128x256
SIZE	19.7" x 39.4" x 3" / 500 x 1000 x 85mm
CHIP	ICN2153
HIGH REFRESH RATE	3840hz
WEIGHT	28,5 lbs / 13 kg
RECEIVING CARD	NovaStar MRV208-1

## POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	400W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS

BRIGHTNESS	4500 NITS
PROTECTION RATE	IP65
SCAN	1/16 s
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
MINIMUM VIEWING DISTANCE	15 ft (4.5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

P 3.91mm

OUTDOOR LED PANEL

DOUBLE