



MIRACKLE®

VP2

ALL-IN-ONE CONTROLLER

VIDEO PROCESSOR Powered by

NOVASTAR





2K

The **Miracle© VP2** all-in-one controller is a pure hardware device that is easy to operate. It features different types of high-definition input connectors, and integrates professional LED screen control technologies and video processing capabilities, making on-site installations effortless.



Designed with an industrial-grade casing, the **Miracle© VP2** is well suited for complex operational environments and can be widely

used in applications such as malls, hotels, exhibition sites and TV studios.



4 GIGABIT
ETHERNET PORTS



HIGH IMAGE
QUALITY



EASY PRESET
SAVING & LOADING



QUICK
CONFIGURATION



CENTRAL
CONTROL DEVICES

Input connectors

1x DVI	1x HDMI 1.3	1x VGA	1x USB	1x CVBS
--------	-------------	--------	--------	---------

Audio input and output

External independent audio

Output connectors


2x Ethernet

FRONT CONTROLLER



- 1 Power button
- 3 Knob
- 5 Scale
- 2 LCD screen
- 4 ESC button
- 6 Input source

BACK CONTROLLER

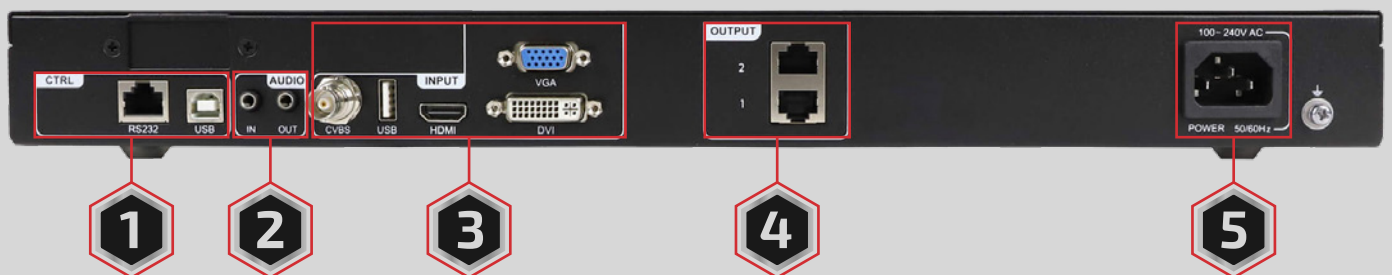

- 1 Control Connectors
- 2 Audio
- 3 Input
- 4 Output
- 5 Power

Features


Press input source buttons to easily switch between the input sources.

EDID management supported

Personalized image scaling: Full screen, pixel to pixel and custom


LED screen color adjustment, such as brightness and Gamma

DIMENSIONS

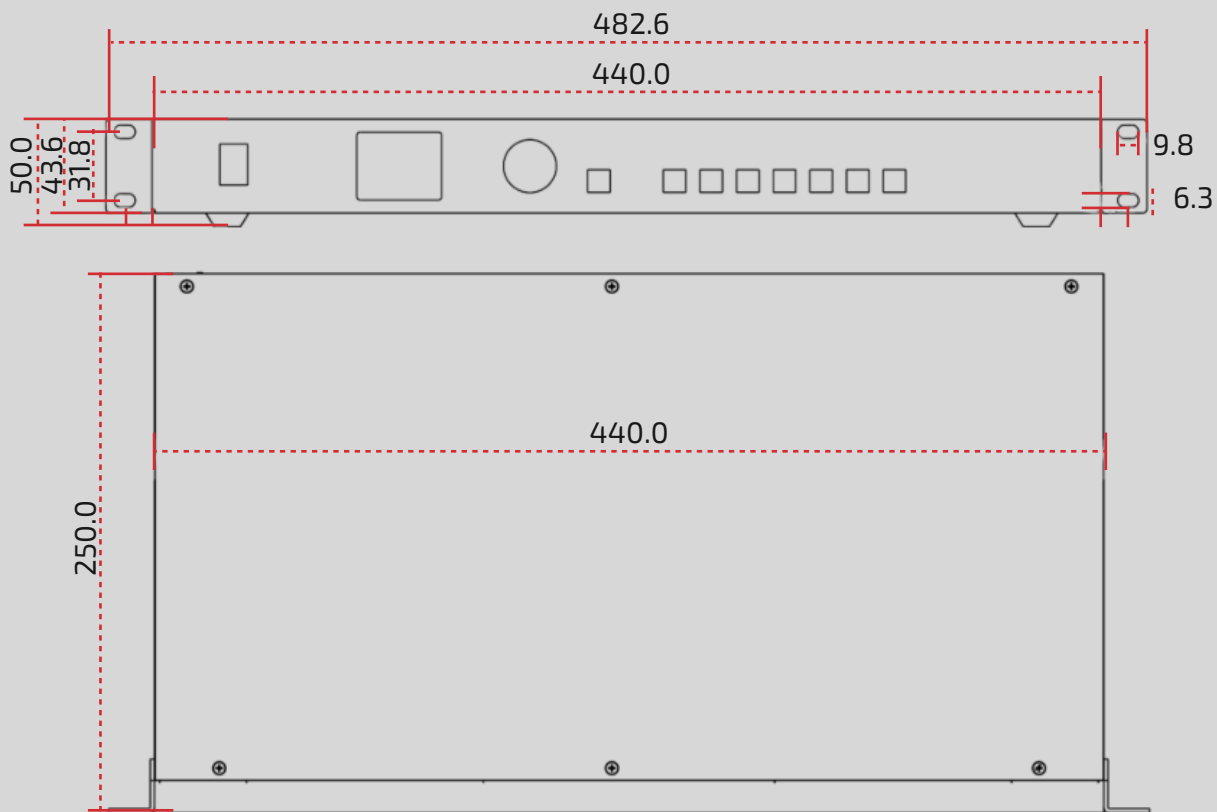

APPLICATIONS

- Adjustable layer position and size, and input cropping supported

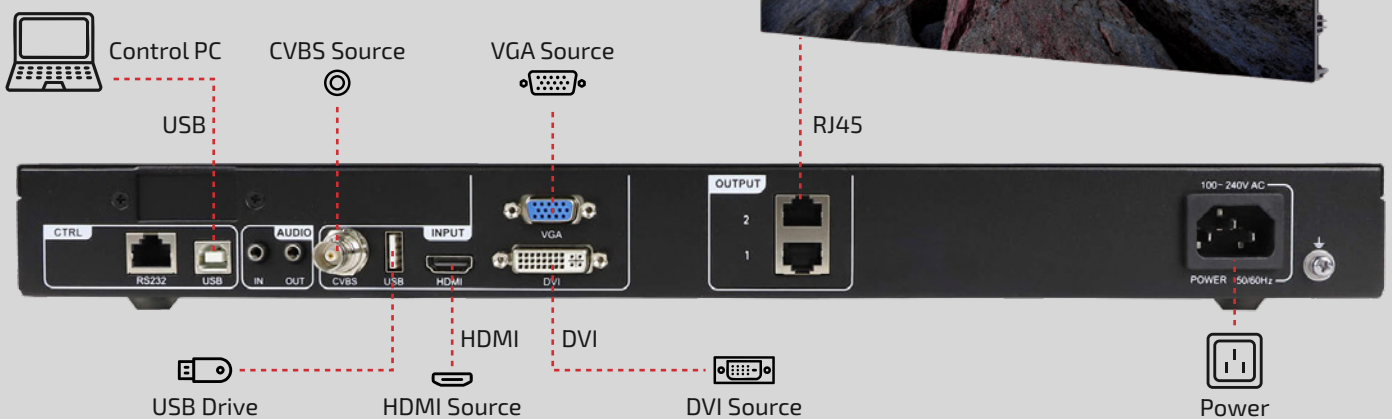

MIRACLE

VP4 - ALL-IN-ONE CONTROLLER

4



Electrical Parameters	Power connector	100-240V AC, 50/60Hz
	Rated power consumption	12W
Operating Environment	Temperature	-20°C to +60°C
	Humidity	20% RH to 90% RH, non-condensing
	Storage humidity	10% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 250.0 mm × 50.0 mm
	Net weight	2.8 kg
	Total weight	6 kg
Packing Information	Accessories	1x Power cable 1x USB cable 1x DVI cable 1x HDMI cable 1x Certificate of Approval
	Carrying Case	565mm × 88mm × 328mm
	Large Outer Case	585mm × 353mm × 113mm
Noise Level (typical at 25°C/77°F)		38 dB (A)



MIRACKLE®

QUALITY & PERFORMANCE IN LED SCREENS



USA MANUFACTURER



BEST FACTORY-DIRECT PRICING



WWW.LEDMARKETUSA.COM



INFO@LEDMARKETUSA.COM

