



Official Reseller  MIRACLE

2.9MM
OUTDOOR
DOUBLE 500×1000
IP65

VIEW PACKAGES ONLINE





5-year warranty
for all parts.



US-Based
Company

DOUBLE 500 x 1000

OUTDOOR P2.97
LED SCREEN PANEL



OUTDOOR
LED PANEL



HIGH REFRESH
RATE



HIGHER
RESOLUTION



FIXED & RENTAL
CABINETS




BACK
SERVICEABLE


2.9MM
OUTDOOR
LED PANEL
DOUBLE 500 x 1000



HIGHLIGHTED COMPONENTS

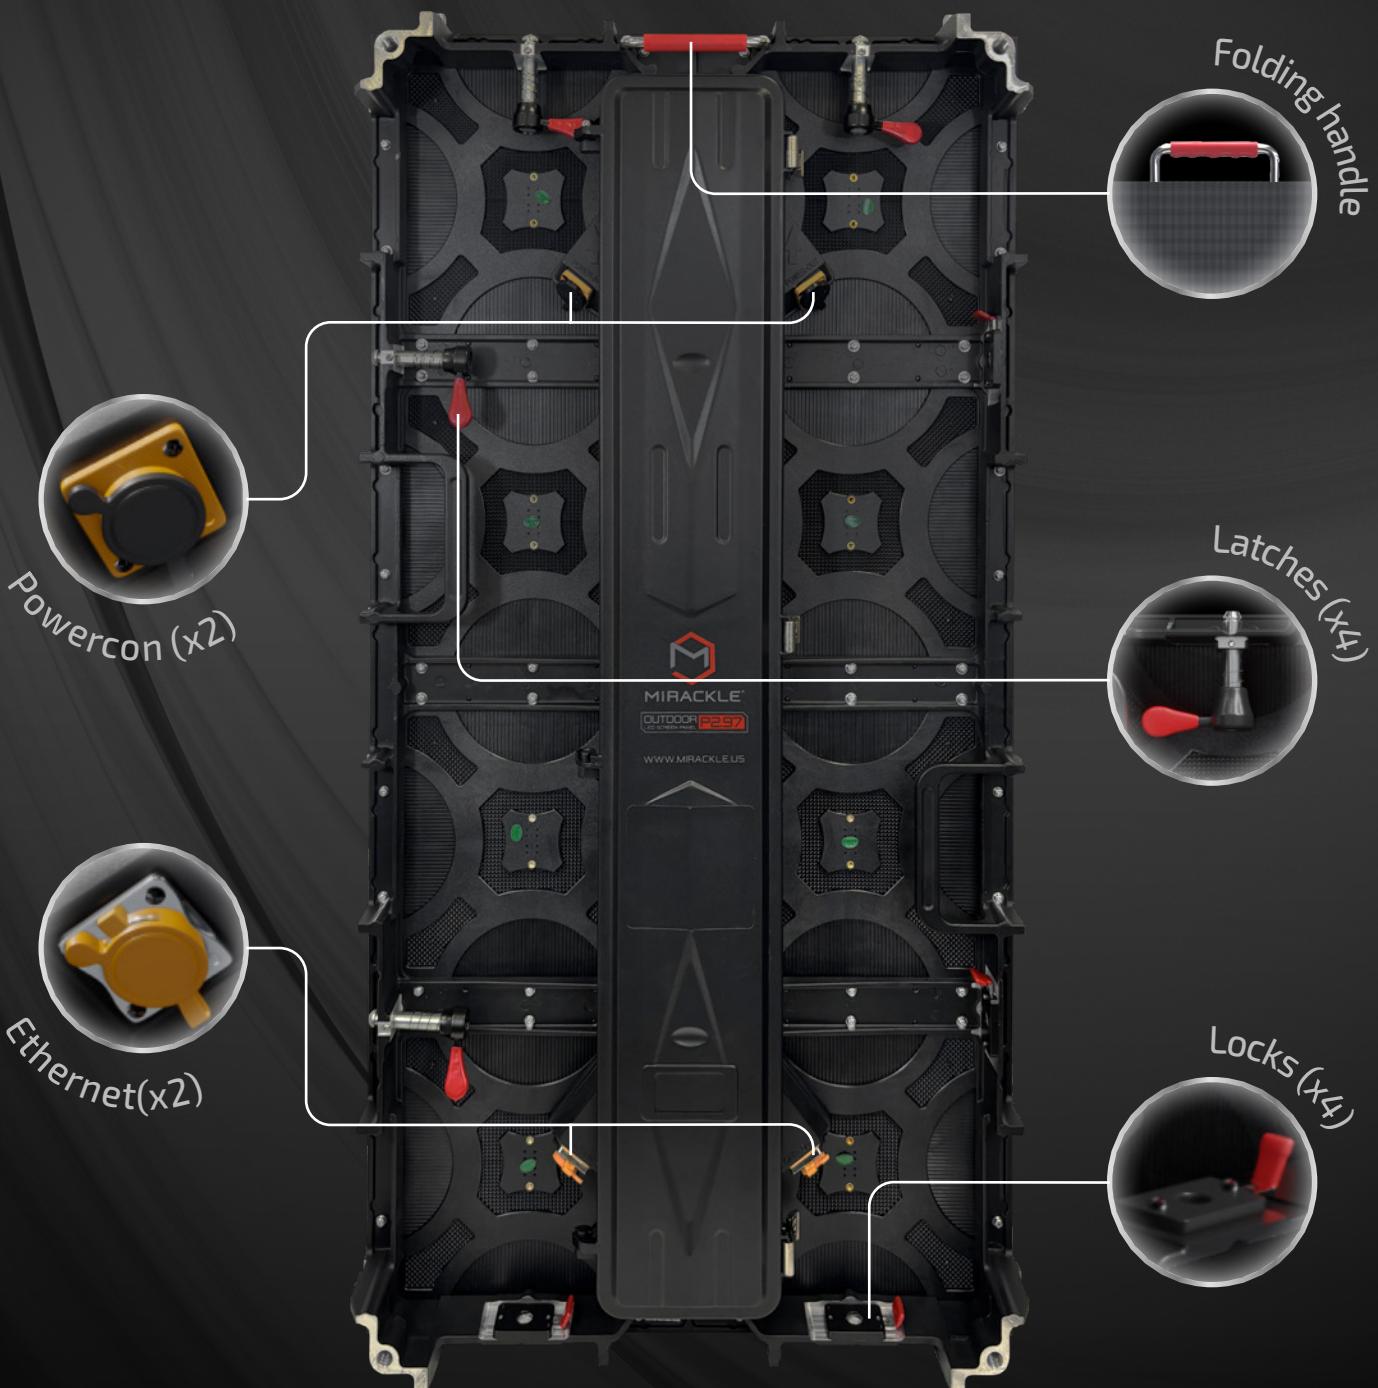

2.9MM **OUTDOOR**
LED PANEL
DOUBLE 500×1000

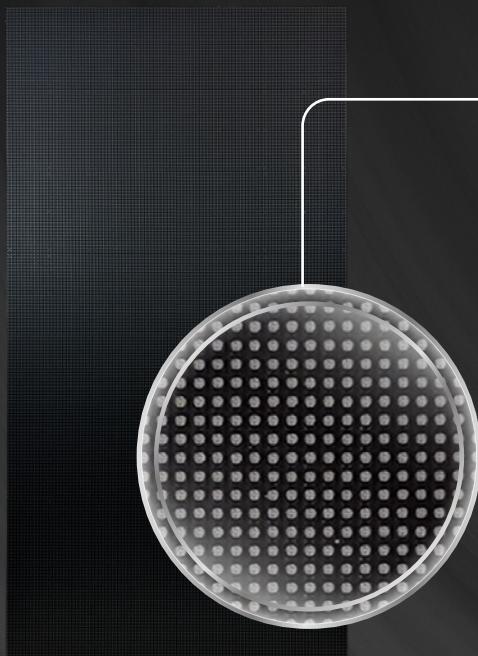

HIGHLY COST-EFFECTIVE

With 8 screwable modules, this LED panel seamlessly combines fine pixel pitch with high refresh rate, plus it is an eco-friendly product.

[WATCH VIDEO](#)

TECHNICAL SPECIFICATIONS

PIXEL PITCH	2.9mm
LED ENCAPSULATION	King-Light SMD1415
PIXEL DENSITY	168 x 336
SIZE	500 x 1000 x 82.5 mm / 19.7" x 39.4" x 3.25"
CHIP	ICN2153
HIGH REFRESH RATE	3840hz
WEIGHT	28.6 lb / pc - 13 kg
RECEIVING CARD	NovaStar MRV208-1



TURN-KEY SOLUTIONS

LED video walls packages in stock, ready to ship immediately across the USA.



EASY INSTALLATION

Connect the power cable, your HDMI device to the video processor and the ethernet port.




TECHNICAL SUPPORT

We have online support with video tutorials, software, user guides and specialized team.

2.9MM
OUTDOOR
LED PANEL
DOUBLE 500 x 1000



BACK SERVICEABLE

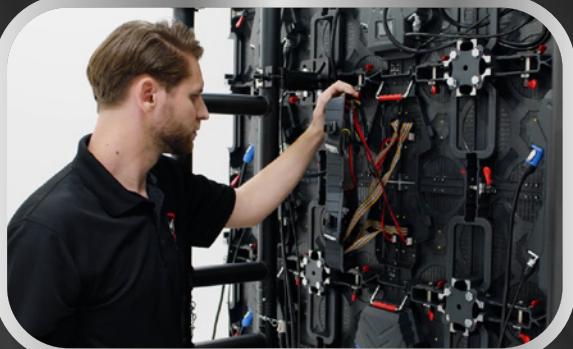

BACK SERVICEABLE

The rear cover features latches that are easy to open manually, which makes it expedited to maintain all of the LED panel components.

POWER SUPPLY (x2)


Slim bar with noiseless technology.



RECEIVING CARD

MRV208-1 NovaStar 3840Hz


By NovaStar, single MRV208-1 supports resolutions up to 256×256@60Hz. Supporting various functions, can significantly improve the display effect and user experience.

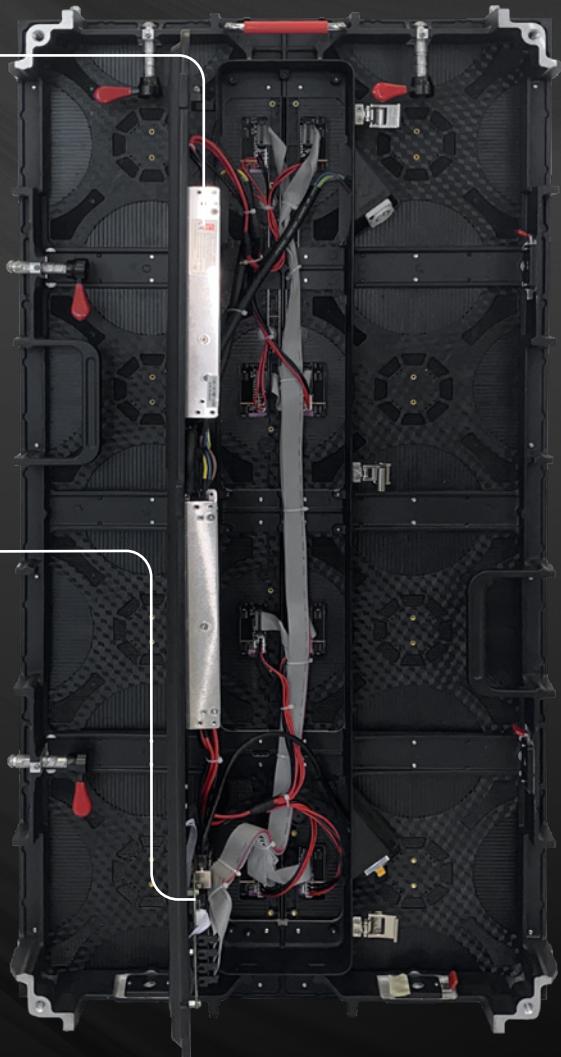


2.9MM
OUTDOOR
LED PANEL
DOUBLE 500×1000



PANEL DIMENSIONS

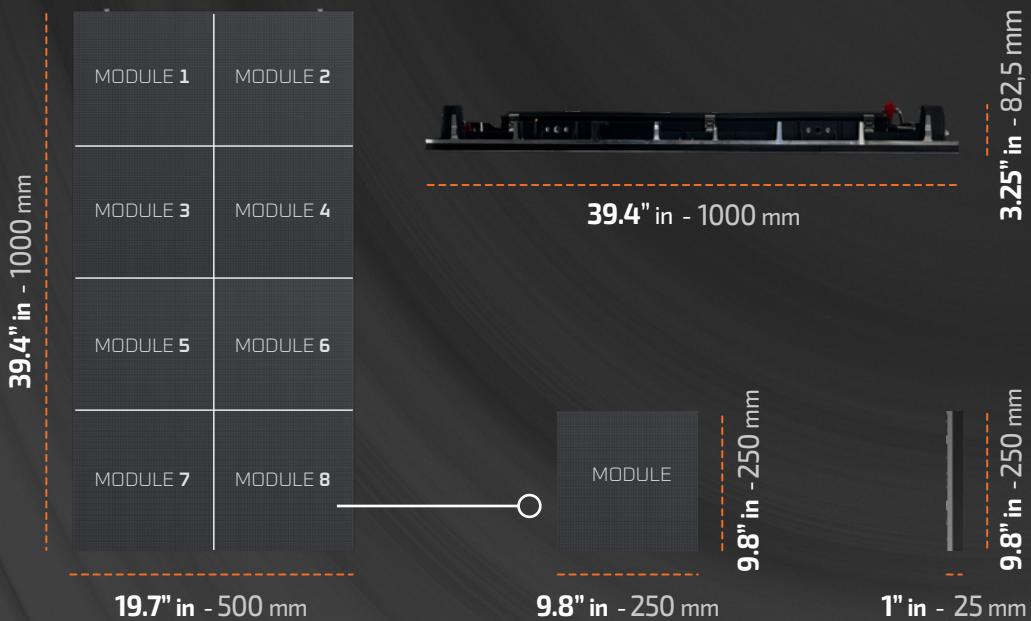

INSTALLATION METHODS



RIGGING

Modular structures with bar and ladder designs, offering height and flexibility configurations. Compatible with all Miracle® LED panels.



FREE STANDING

Durable aluminum construction, ideal for overhead truss systems, ceiling grids, cranes, or similar setups. Fully compatible with Miracle® LED panels.

[WATCH VIDEO](#)

2.9MM
OUTDOOR
LED PANEL
DOUBLE 500x1000

VIEWING DISTANCE

[WATCH VIDEO](#)

PIXEL PITCH (MM)	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.5
MIN. VIEW DISTANCE	25 FT.	20 FT.	15 FT.	10 FT.	6 FT.	5 FT.	4 FT.	3 FT.



OPTICAL RATINGS

BRIGHTNESS	5500 NITS
PROTECTION RATE	IP65
SCAN	1/21 s
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
MINIMUM VIEWING DISTANCE	10 ft (3 m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	400W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out



Official Reseller  MIRACLE



CONTACT US



WWW.LEDMARKETUSA.COM



INFO@LEDMARKETUSA.COM



2125 BISCAYNE BLVD, SUITE 272
MIAMI, FL, 33137



+1 (888) 204-8885



LEDMARKETUSA



LEDMARKETUSA



LEDMARKETUSA