



LED MARKET

Powered by



MIRACLE



1.5 MM

INDOOR

IP45

BANNER

VIEW PACKAGES ONLINE





5-YEAR WARRANTY
for all parts.



US-Based
Company

BANNER

INDOOR LED SCREEN PANEL P1.53



INDOOR
LED PANEL



HIGH REFRESH
RATE



HIGHER
RESOLUTION



FIXED & RENTAL
CABINETS



FRONT
SERVICEABLE

1.5MM

INDOOR
LED PANEL

BANNER



HIGHLIGHTED COMPONENTS



Individual LED Banner
or Full LED Video Wall

All-in-one LED display.
Use it vertically, folded, or
connect multiple units to
create a larger LED video wall.

25.2" in - 640 mm


25.2" in - 640mm

37.8" in - 960 mm

75.6" in - 1920 mm



1.5MM INDOOR LED PANEL
BANNER

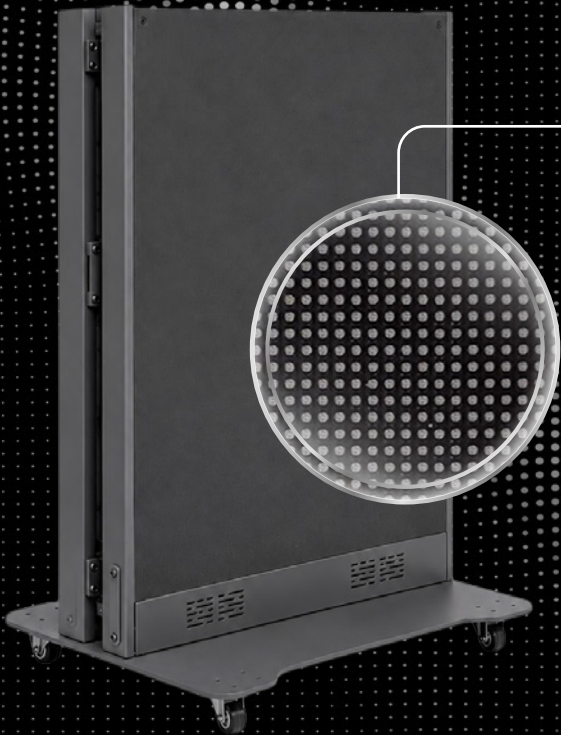

GOB MASK

- + Anti reflection
- + Anti Moire effect

GOB is an improvement of traditional SMD technology, it is used for certain applications that require high-level protection of the LED front module. Used for broadcasting and virtual studios.

[WATCH VIDEO](#)

TECHNICAL SPECIFICATIONS

PIXEL PITCH	1.5mm
LED ENCAPSULATION	King-Light SMD1212
PIXEL DENSITY	422,500 dot/m2
SIZE	640 x 1920 mm / 25.2" x 75.6"
CHIP	ICN 1065s
HIGH REFRESH RATE	7680 Hz
WEIGHT	112.4 lb / 51 kg
RECEIVING CARD	NovaStar MRV 412-N



TURN-KEY SOLUTIONS

LED video walls packages in stock, ready to ship immediately across the USA.



EASY INSTALLATION

Connect the banner with the power cable, upload the content, and enjoy the visuals.



TECHNICAL SUPPORT

We have online support with video tutorials, software, user guides and specialized team.

1.5MM
BANNER

INDOOR
LED PANEL



HIGHLIGHTED COMPONENTS

POWER SUPPLY


Slim bar with noiseless technology.



RECEIVING CARD


MRV412-N NovaStar 7680 Hz

High-capacity processing with pixel-level calibration, advanced color control, ultra-high refresh rates, and reliable signal redundancy

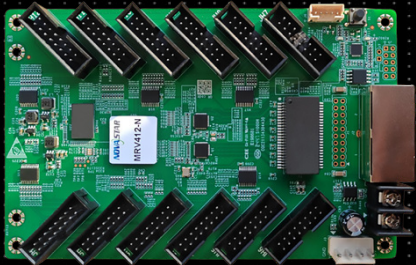

1.5MM
BANNER

INDOOR
LED PANEL

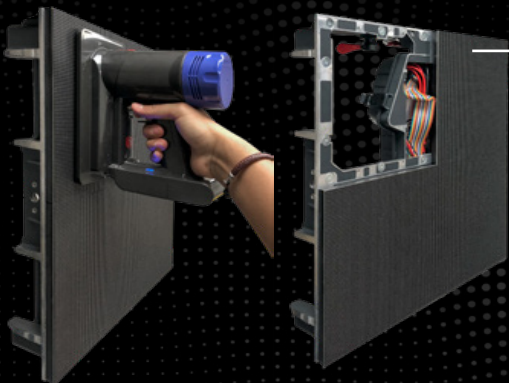

FRONT SERVICEABLE


Magnetic module system

Our magnetic module system is designed to simplify the assembly, repair, and replacement of LED display components. Each module is equipped with strong magnets, allowing for quick and tool-free installation. Modules can be easily removed manually or with a special tool, ensuring hassle-free maintenance and minimizing downtime.

VIEWING DISTANCE

[WATCH VIDEO](#)

PIXEL PITCH (MM)	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.5
MIN. VIEW DISTANCE	25 FT.	20 FT.	15 FT.	10 FT.	6 FT.	5 FT.	4 FT.	3 FT.

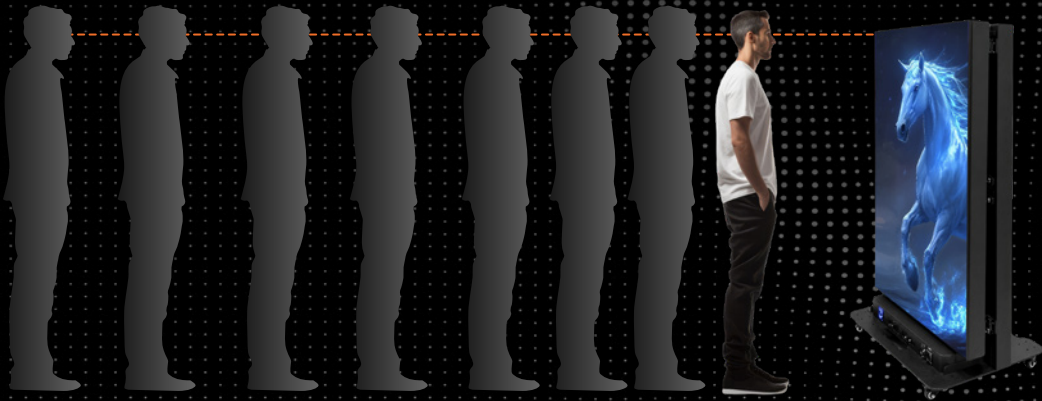

OPTICAL RATINGS

BRIGHTNESS	1200 NITS
PROTECTION RATE	Front IP65 / Back IP43
SCAN	1/52s
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 170° / Vertical 120°
MINIMUM VIEWING DISTANCE	3 ft (0.9 m)
BRIGHTNESS ADJUSTMENT	650 cd/m2

1.5MM
BANNER

INDOOR
LED PANEL



LED MARKET

Powered by



MIRACLE



NOVASTAR



CONTACT US



WWW.LEDMARKETUSA.COM



INFO@LEDMARKETUSA.COM



2125 BISCAYNE BLVD, SUITE 272
MIAMI, FL, 33137



+1 (888) 204-8885



LEDMARKETUSA



LEDMARKETUSA



LEDMARKETUSA