

KRØEN

High end panels



LED
MARKET

INDOOR P1.25

INDOOR P1.25

KRØEN

Specialized LED panels for:

◆ **BROADCAST** ◆ **TV STUDIOS** ◆ **VIRTUAL PRODUCTION**



Ultra-High
REFRESH RATE

4K UHD
7680 Hz

Industry-Leading
RECEIVING CARD

NOVA STAR
A10s Pro

High-Efficiency
POWER SUPPLY

MW
MEAN WELL

Zero-Flicker
BLACK LED PIXELS

Kinglight®

KRØEN



**LED
MARKET**


INDOOR P1.25

HIGHLIGHTED COMPONENTS


LATCHES (X8)



FOLDING HANDLE



POWERCON (X2)

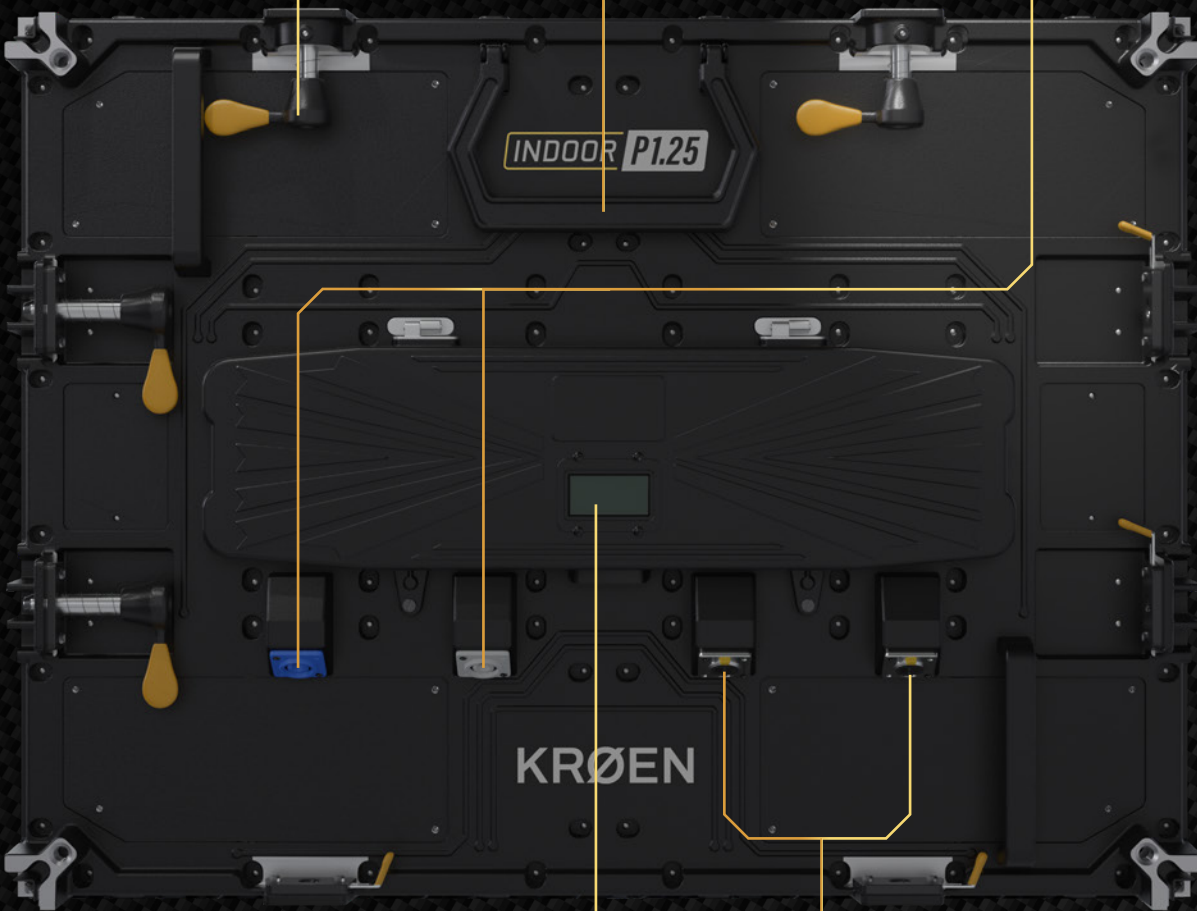

LED DISPLAY



ETHERNET (X2)

PREMIUM COMPONENTS

GOB MASK

- + ANTI REFLECTION
- + ANTI MOIRE EFFECT



GOB is an improvement of traditional SMD technology, it is used for certain applications that require high-level protection of the LED front module. Used for broadcasting and virtual studios.

High-Efficiency POWER SUPPLY

Engineered for maximum stability and reliability in **broadcast-grade studio** environments, delivering consistent high-performance output for **TV studios**, **film** and **virtual production**.

Industry-Leading RECEIVING CARD

Cutting-edge technology built for **professional broadcasting services**, delivering outstanding image quality and vibrant color reproduction.

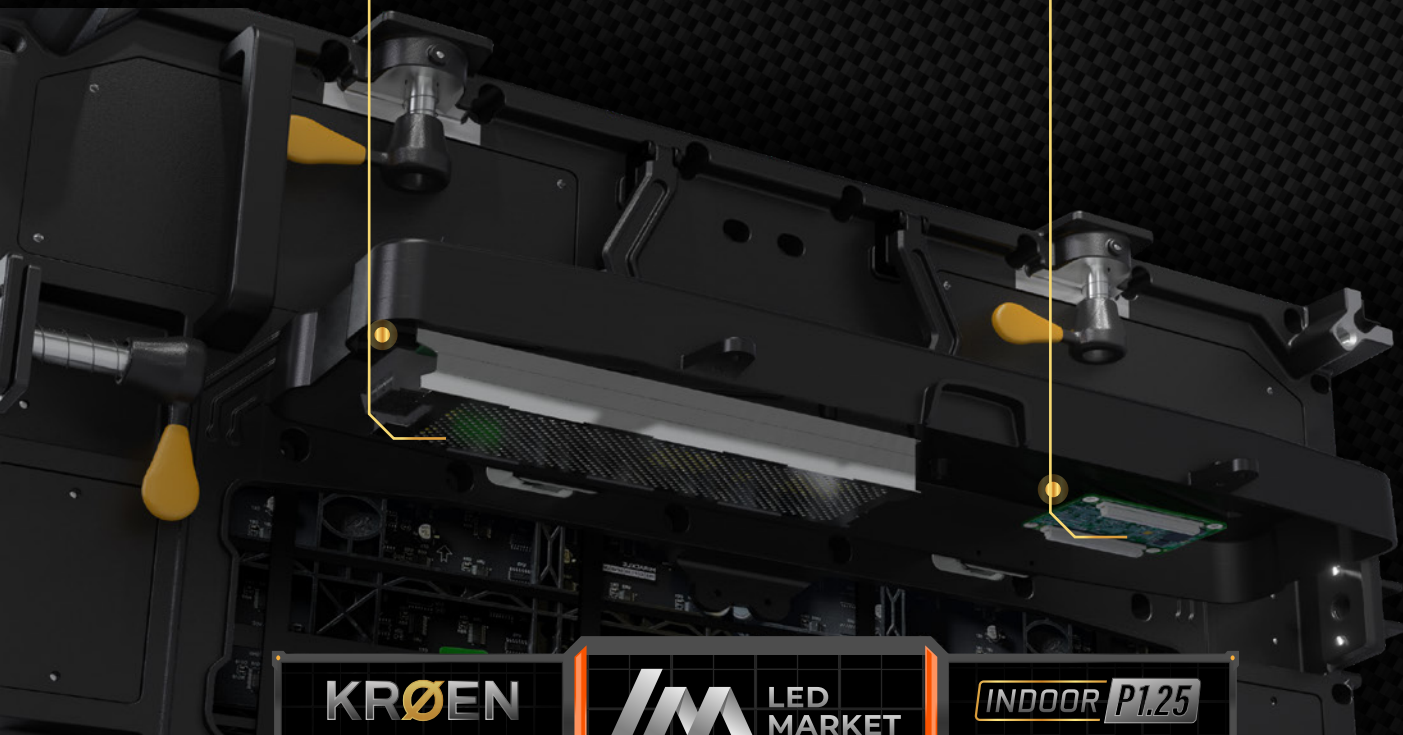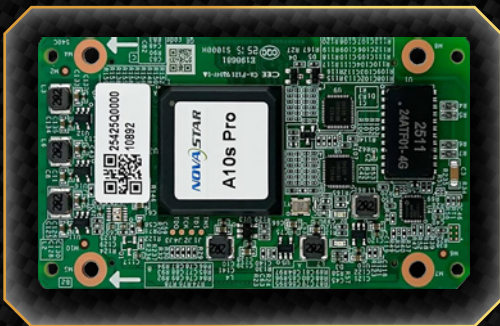


KRØEN




LED
MARKET

INDOOR P1.25

PANEL DIMENSIONS

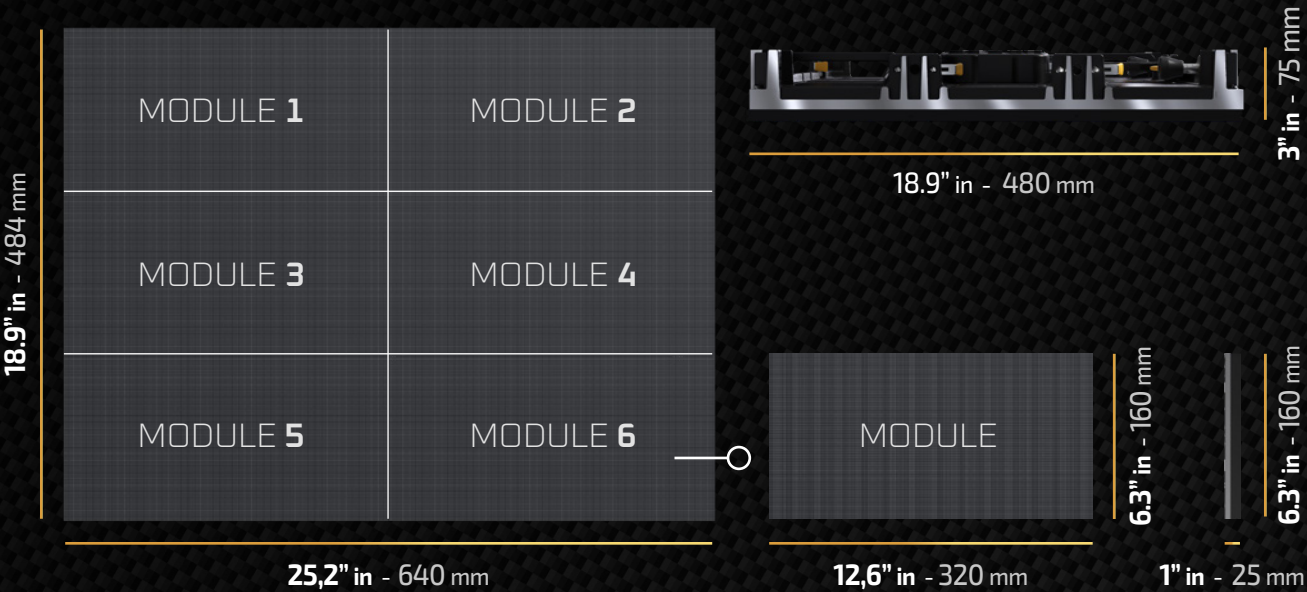

PIXEL PITCH (MM)	5.0	4.8	3.9	2.9	2.5	1.9	1.8	1.2
MIN. VIEW DISTANCE	25 FT.	20 FT.	15 FT.	10 FT.	6 FT.	5 FT.	4 FT.	3 FT.

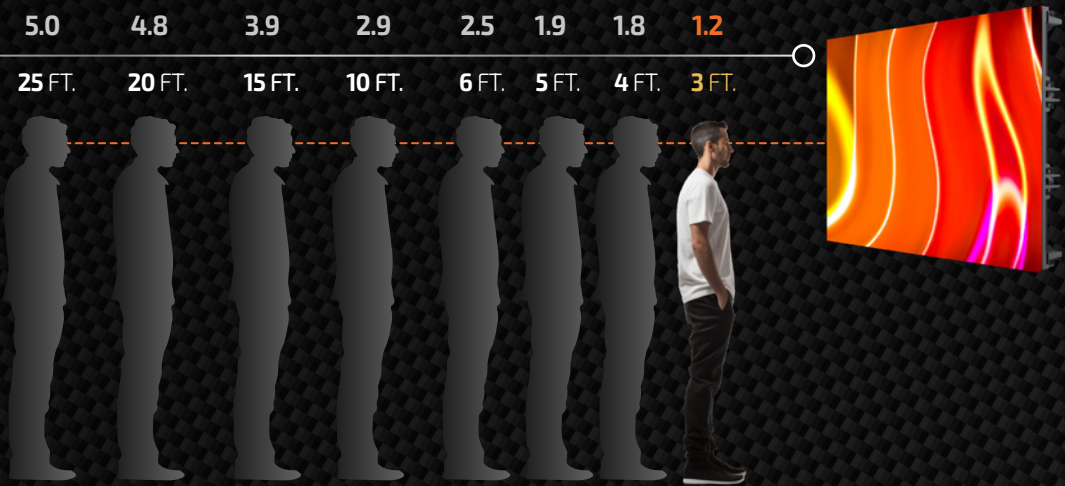

FRONT SERVICEABLE

Magnetic module system

Easily removable magnetic module system to simplify assembly, repair or replacement of components. They can be removed with a special tool or manually.

TECHNICAL SPECIFICATIONS

PIXEL PITCH	P1.25mm
LED ENCAPSULATION	Kinglight SMD1010 Black LED
PIXEL DENSITY	512 x 384
SIZE	640 x 480 x 75 mm / 25.2" x 18.9" x 3"
CHIP	ICN1065s
HIGH REFRESH RATE	7680Hz
WEIGHT	22 lb / pc - 10 kg
RECEIVING CARD	NovaStar A10s Pro

OPTICAL RATINGS

BRIGHTNESS	1500 NITS
VIEW ANGLE	Horiz/Vert 140°
MIN. VIEW DISTANCE	1m (3ft)
CONTRAST RATIO	4000:1 – 6000:1
PROTECTION RATE	IP45
BRIGHTNESS	0~100% 100 Levels
SCAN MODE	1/64 Scan
OPERATING LIFE	100,000 Hours

POWER SUPPLY


OPERATION POWER	100~240V 50-60Hz
AUTO SWITCH	Yes
POWER SUPPLY BRAND	Mean Well
POWER CONSUMPTION	200 W/pc

COMPATIBLE SUPPORTS




WALL MOUNTABLE

It is the most common support and above all the most stable considering the type of construction where it is mounted, since it is screwed through the holes included in our panels.

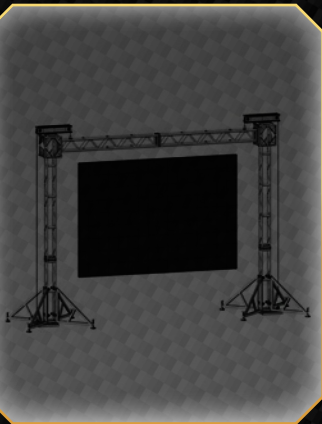

TRUSS SYSTEMS

Manufactured with heavy-duty aluminum material, ideal for overhead truss system, a ceiling grid, a crane, or other support structure from above.

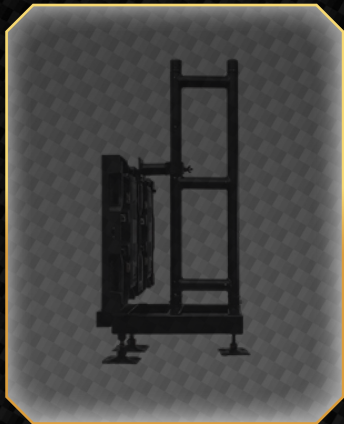

GROUND SUPPORT

Bar and ladder truss that creates a stable system to support your screen in various configurations and offers flexibility in height as well as width.

PRECISION INDUSTRY-LEADING BROADCAST + TV STUDIOS + VIRTUAL PRODUCTION



HIGH REFRESH RATE

With 4K resolution and a 7680Hz refresh rate for zero flicker, delivering ultra-high-impact, vivid visuals.



PLUG AND PLAY

Easy-to-install turnkey LED video wall packages in stock and ready for immediate U.S. shipping.



TECHNICAL SUPPORT


A specialized local U.S. team and online resources, including video tutorials, software, and user guides.



LED
MARKET

OFFICIAL DEALER

KRØEN NOVA STAR

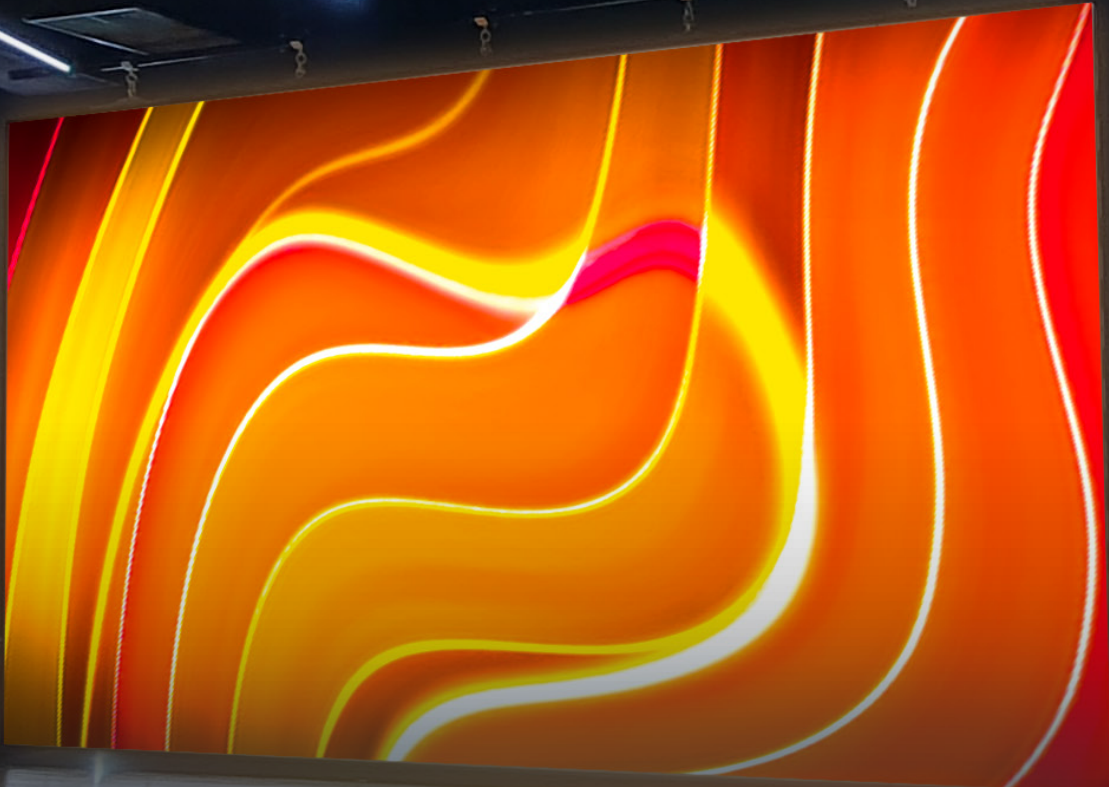

CONTACT US



WWW.LEDMARKETUSA.COM



INFO@LEDMARKETUSA.COM



2125 BISCAYNE BLVD, SUITE 272
MIAMI, FL, 33137



+1 (888) 204-8885



LEDMARKETUSA



LEDMARKETUSA



LEDMARKETUSA